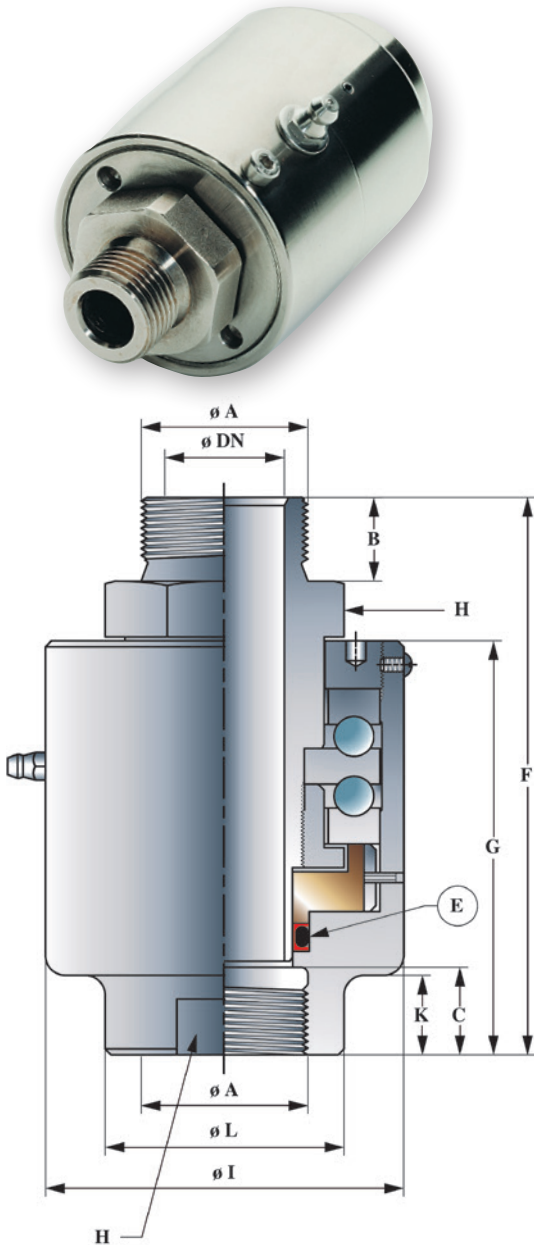


TECHNICAL FEATURES

REFERENCE	1800 SRDE K/I BSPP, NPT or Metric
DIMENSIONS	1/4" to 3" BSP
MATERIAL	1800 SRDE K : nickel plated steel 1800 SRDE I : stainless steel 316 L
THREAD	Male and female connection right-hand BSPP thread right-hand tapered NPT. Right-hand metric
PRESSURE	Maximum 700 bar except stainless steel (see table)
TEMPERATURE	Maximum 150° C
ROTATION	Swiveling motion, slow or articulated rotation
APPLICATION	Attached fittings on high pressure hoses, spray painting, hydraulic hose reels, robots ...
OBSERVATIONS	Ball bearing and Teflon seal for easy rotation. Full bore.
CONNECTION	With hoses
USE	Oil, air, gas, vacuum, water (1800 SRDE K), (1800 SRDE I stainless steel), lubrication (from 1821 SRDE K)


1800 SRDEK - I (Very High pressure)

Ref.		1813SRDE K / I	1817SRDE K / I	1821SRDE K / I	1827SRDE K / I	1834SRDE K / I	1842SRDE K / I	1849SRDE K / I	1860SRDE K / I	1876SRDE K / I	1890SRDE K / I
Dimensions	A	GAZ / NPT Métrique 1/4" / 14 x 150	3/8" / 16 x 150	1/2" / 22 x 150	3/4" / 27 x 200	1" / 33 x 200	1" 1/4 / 42 x 200	1" 1/2 / 50 x 150	2" / 42 x 150	2" 1/2 / 50 x 150	3" / 66 x 150
	B	10	11	15	16	19	21	21	25	32	30
	C	11	12	16	17	20	22	22	26	30	32
	Ø DN	7	9	12	18	22	30	36	42	50	66
	E (V43)	GR813 SR V43	GR821 SR V43	GR821 SR V43	GR23 V43	GR834 SR V43	GR842SR V43	GR849 SR V43	GR860 SR V43	GR70 V43	GR90 V43
	F	92	102	106	120	134	140	152	164	190	209
	G	74	80,5	80,5	90	101	104	117	124	146	163
	H	21 / Flat	32 / Flat	32 / Flat	36 / Flat	50 / Flat	55 / Flat	60 / Flat	67 / Flat	100 / Flat	120 / Flat
	Ø I	48	55	55	63	84	90	104	114	150	174
	K	15	15	15	20	20	20	25	25	30	30
	Ø L	23	37	37	40	54	60	66	74	108	132
Max. Pressure K/I		700/350	700/350	600/300	500/250	500/250	500/250	400/200	400/200	400/200	400/200

NPT Model and Metric On Request - Stainless steel Models contact us *On Request