

TECHNICAL FEATURES











REFERENCE	1800 SRK : nickel plated steel 1800 SRI : stainless steel
DIMENSIONS	1/4" to 3" BSP
MATERIAL	1800 SRK : nickel plated steel 1800 SRI : stainless steel 316 L
THREAD	Male and female in BSP thread, right-hand connection
PRESSURE	Maxi 350 bar sauf inox (voir tableau)
TEMPERATURE	Maximum 150° C
ROTATION	Swiveling motion, slow or articulated rotation
APPLICATION	Attached fittings on high pressure hoses, spray painting, hydraulic hose reels, etc...
OBSERVATIONS	Ball bearing and Tefl on seal for easy rotation. Full bore.
CONNECTION	With hoses
USE	Oil, air, gas, vacuum, water (1800 SRK), chemicals (1800 SRI), lubrication (from 1827 SRK)



Conversion table

Bar	PSI
1	14,5038

Performance Charts

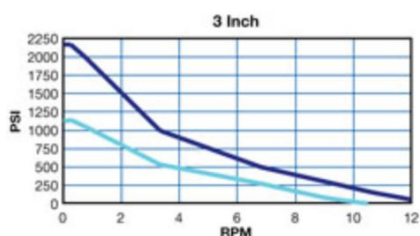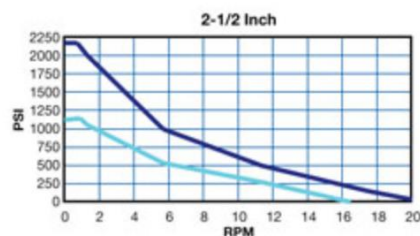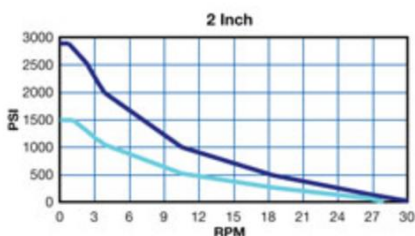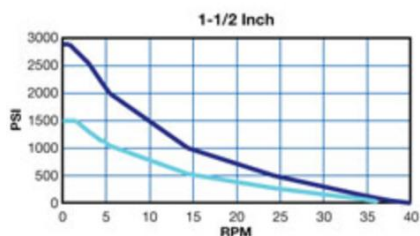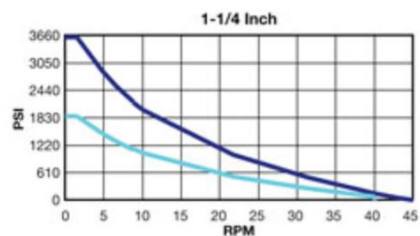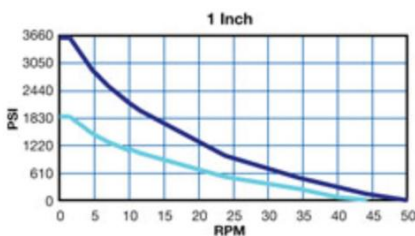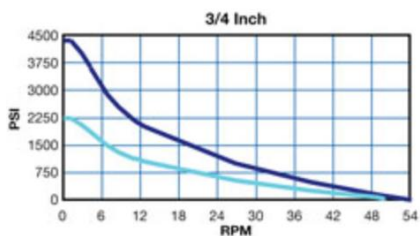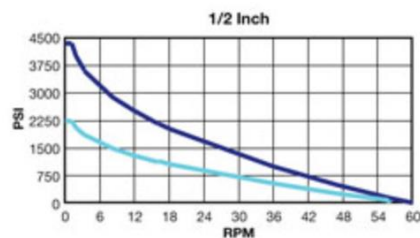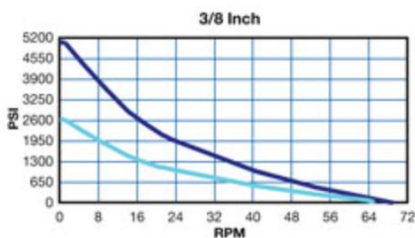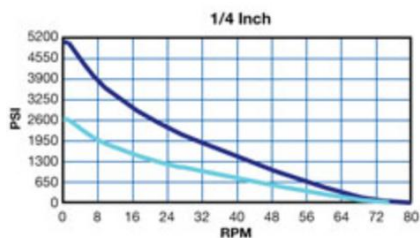

 Standard Material
 Stainless Steel