


## TECHNICAL FEATURES



REFERENCE	MC RVR
DIMENSIONS	ND 6 to 10 mm
MATERIAL	Shaft AISI 420 - Aluminum housing
THREAD	Outlets BSPP thread tapered, right-handed, (NPT on request) flange installation, all connections on request.
PRESSURE	12 bar maximum
TEMPERATURE	120° C maximum
ROTATION	0 to 3000 r.p.m. depending on diameter and pressure
APPLICATION	Supply to dual purpose cylinder on rotating shaft, pneumatic cylinder control, transfer machines, revolving tables, cooling circuits etc...
OBSERVATIONS	Mounted on ball bearings, identical port diameters.
CONNECTION	Use flexible hoses from ND 1/8" to 3/8" BSPP
USE	Oil, air, water, gas, etc...

## Performance Charts

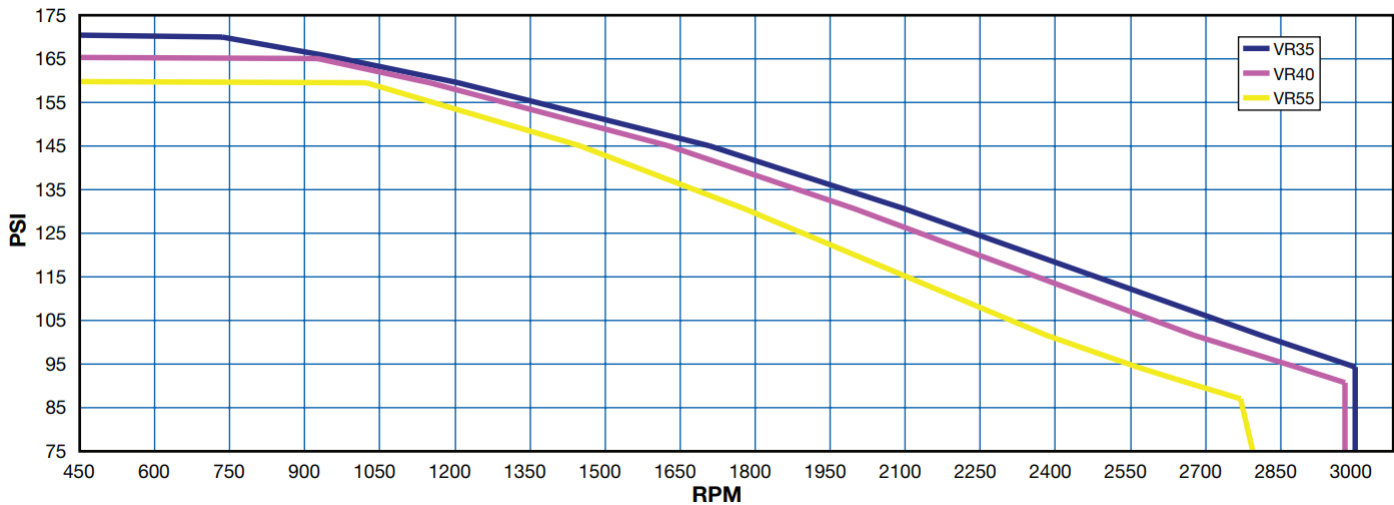

Conversion table

Bar	PSI
1	14,5038